
REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIALS
A	INITIAL RELEASE	9/4/24	4528	PMZ

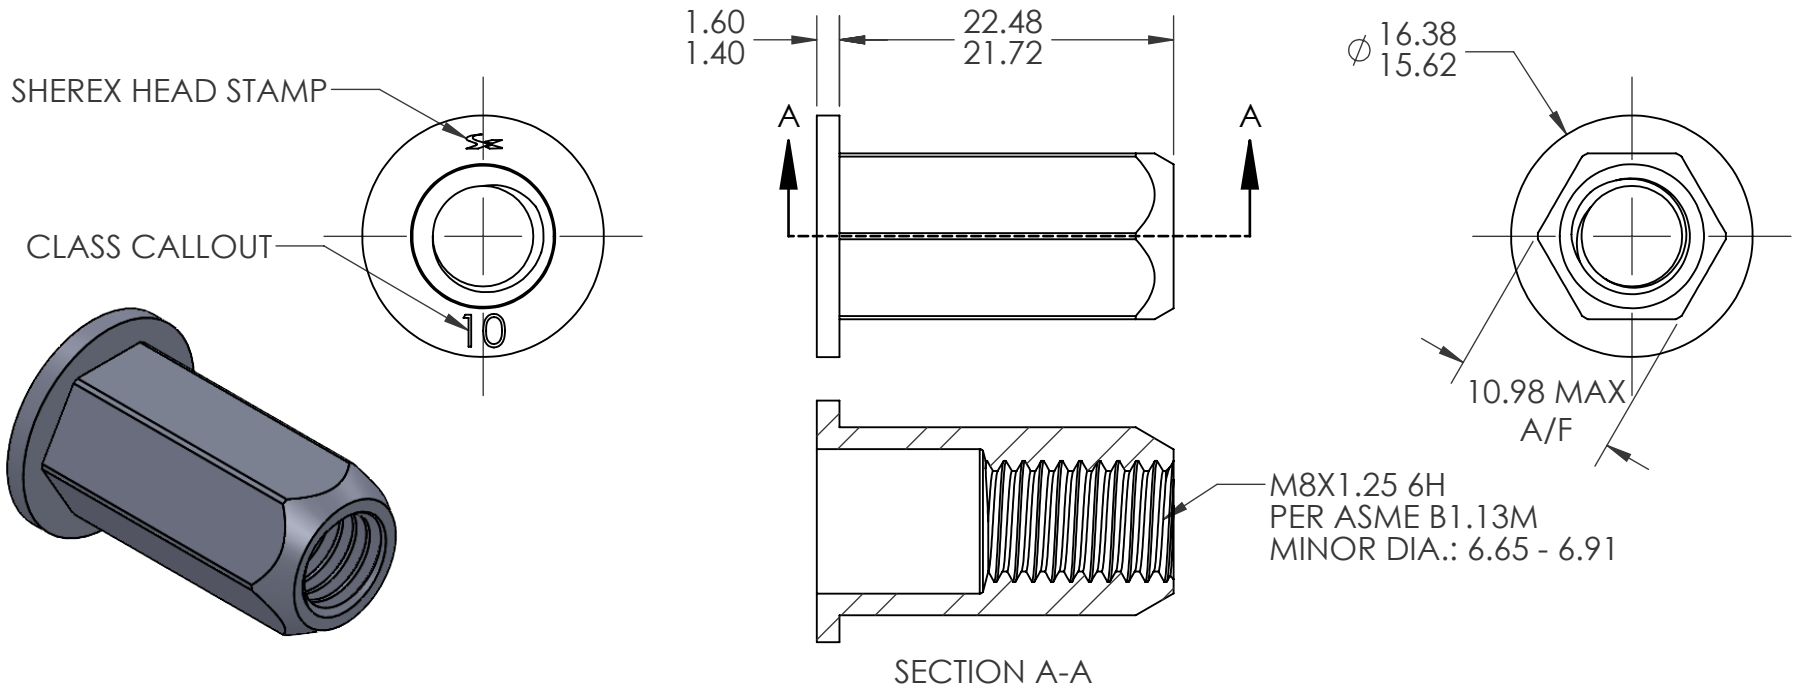

NOTE:
1. GRIP RANGE: 1.0 - 3.0
2. HOLE SIZE: 11.00 +0.15/-0.00 A/F AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: 16.10 MAX
4. LUBRICATION: NONE
5. INSTALLATION TOOL: FLEX 18/RIV 943 SPIN PULL
6. THREAD MEETS CLASS 10 PROOF LOAD PER ISO 898-2: 38.1kN

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTTO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
ANGULAR: MACH ± 1 BEND ±1
ONE PLACE DECIMAL ±0.3
TWO PLACE DECIMAL ±0.08

INTERPRET GEOMETRIC TOLERANCING PER:
ASME Y14.5M-1994

MATERIAL
10B21

FINISH
ZINC PLATE CLEAR TRIVALENT CHROMATE PER SHEREX SFS-01-001 SC1

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	PMZ	9/4/24
CHECKED		
ENG APPR.	JVK	9/4/24
MFG APPR.	AP	9/4/24
Q.A.		

COMMENTS:

E-mail: info@sherex.com
www.sherex.com
Phone: 866-474-3739
Fax: 716-875-0358

TITLE:
FULL HEX HIGH STRENGTH

SIZE	DWG. NO.	REV
A	HHS2-8125-3.0	A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1

5 4 3 2 1

E D C B A