



## PennEngineering

### Corporate Headquarters - Danboro, PA

5190 Old Easton Rd.

Danboro, PA 18916

**Phone:** 215-766-8853

**Toll-Free Phone:** 1-800-237-4736 (U.S. only)


**Email:** [info@pemnet.com](mailto:info@pemnet.com)

**Website:** [www.pemnet.com](http://www.pemnet.com)

## Part # BSOS-6440-28, Blind Threaded Standoffs - Types BSO, BSOA, BSOS - Unified


These standoffs, which use the proven self-clinching design, install with a squeeze in properly sized round holes - and become permanently mounted in the thin sheet.

When blind-threaded types are used, outer sheet surfaces are not only flush, but c

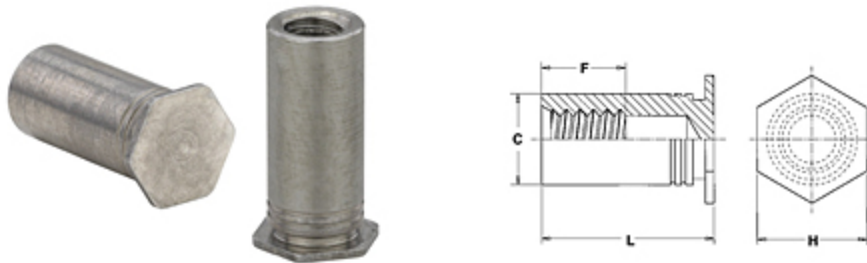

### Specifications

<b>Thread Size</b>	.112-40 (#4-40)
<b>Thread Code</b>	6440
<b>Length Code</b>	28
<b>Material Code</b>	S
<b>Min. Sheet Thickness</b>	.040 in
<b>Hole Size in Sheet + .003 - .000</b>	.213 in
	.212 in
<b>C + .000 - .005</b>	
<b>F Min.</b>	.375 in
<b>H Nom.</b>	.250 in
<b>L - Length +.002 -.005</b>	.875 in
<b>Min. Dist. Hole C/L to Edge</b>	.27 in
<b>For Use in Sheet Hardness<sup>1</sup></b>	HRB 70 / HB 125 or Less
<b>Thread Specification</b>	Internal, ANSI B1.1, 2B



<b>Fastener Material</b>	300 Series Stainless Steel
<b>Standard Finish</b>	Passivated and/or Tested Per ASTM A380
<b>CAD Supplier</b>	PennEngineering® (PEM®)

<sup>1</sup> HRB - Hardness Rockwell "B" Scale. HB - Hardness Brinell.