



PennEngineering

Corporate Headquarters – Danboro, PA

5190 Old Easton Rd.

Danboro, PA 18916

Phone: 215-766-8853


Toll-Free Phone: 1-800-237-4736 (U.S. only)

Email: info@pemnet.com


Website: www.pemnet.com

Part # AEOS10-420-165, Thin-Wall Low-Profile Head Threaded Insert - Unified

- Features a low-profile.
- Allows near-flush installations with no need for special hole preparations such as countersinking or dimpling.
- Additional thread sizes and grip ranges available.

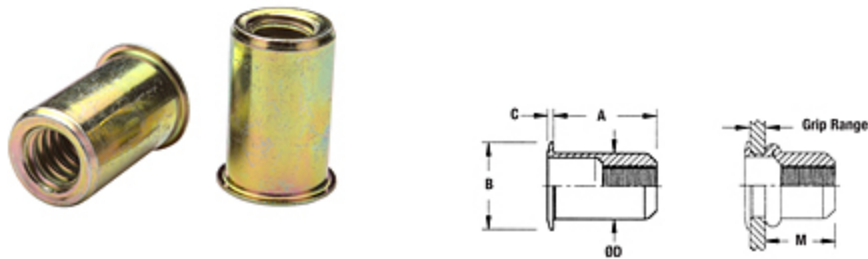

Specifications

Thread Size	1/4-20
Grip Range	.030 - .165 in
B ± .015	.425 in 
C Nom.	.022 in
øD Max.	.374 in
M Ref.	.440 in
Hole Size in Sheet + .006 - .000	.375 in
Fastening	Installed
Thread Specification	2B per ASME B1.1
Standard Material	Low Carbon Steel
Standard Finish	RoHS Compliant Zinc Clear Plus Lubricant
CAD Supplier	PennEngineering® (Atlas®)

