



## PennEngineering

### Corporate Headquarters – Danboro, PA

5190 Old Easton Rd.

Danboro, PA 18916

**Phone:** 215-766-8853


**Toll-Free Phone:** 1-800-237-4736 (U.S. only)

**Email:** [info@pemnet.com](mailto:info@pemnet.com)

**Website:** [www.pemnet.com](http://www.pemnet.com)


## Part # PFC4-M5-50, Captive Panel Screw-Tool only, Non Flush, Spring-loaded PFC4 - Metric


- Installs into stainless steel sheets HRB 88 or less.
- Fully concealed-head for tool only access.
- UL approved.
- Assorted screw lengths for most applications.

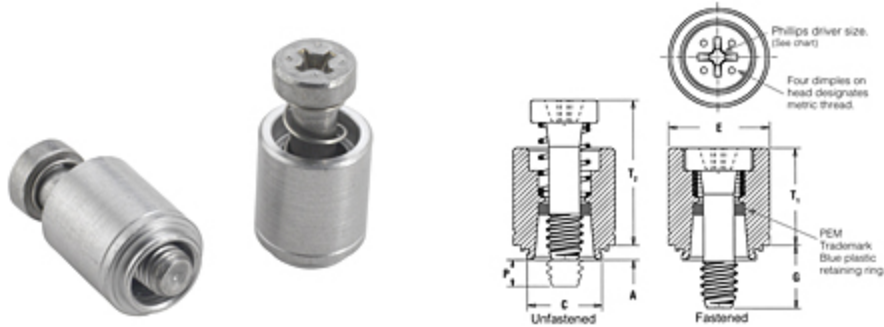

### Specifications

Thread Size x Pitch	M5 x 0.8
Type	PFC4
Thread Code	M5
Screw Length Code	50
	1.53 mm
A (Shank) Max.	
Min. Sheet Thickness	1.53 mm
Hole Size in Sheet + 0.08	8.74 mm
C Max.	8.72 mm
E ± 0.25	11.10 mm
G ± 0.4	7.90 mm



<b>P ± 0.64</b>	0 mm
<b>T1 Max.</b>	12.45 mm
<b>T2 Nom.</b>	17.91 mm
<b>Driver Size</b>	#2 Phillips
	
<b>Min. Dist. Hole C/L to Edge</b>	8.63 mm
<b>Thread Specification</b>	ANSI/ASME B1.13M, 6g
<b>Material Retainer</b>	400 Series Stainless Steel
<b>Material Screw</b>	400 Series Stainless Steel
<b>Material Spring</b>	300 Series Stainless Steel
<b>Finish Retainer</b>	Passivated per ASTM and/or tested A380
<b>Finish Screw</b>	Passivated and/or tested per ASTM A380
<b>Finish Spring</b>	Natural Finish
<b>For Use in Sheet Hardness</b>	HRB 88 or Less (Hardness Rockwell “B” Scale) / HB 183 or Less (Hardness Brinell)
<b>CAD View</b>	Fastened
<b>CAD Supplier</b>	PennEngineering® (PEM®)